

MENUMASTER[®] Commercial

Project #: _____

Item #: _____



Market Regions: Asia & Oceania

Chef Line | Heavy Volume
This category of microwave oven is ideal for...

Applications

- Fast casual dining
- Prep stations
- Bars & grills
- Quick service restaurants
- Casual dining
- Convenience stores
- Bakery cafés
- Kiosks
- Food courts

Through put potential by oven wattage (items per hour)

| Food item | 1400W | 1800W | 1900W | 2000W |
|---------------------------------------|-------|-------|-------|-------|
| Steamed Shrimp (227g (8oz)) | 24 | 33 | 34 | 36 |
| Scrambled Eggs (120g (4oz)) | 55 | 65 | 68 | 69 |
| Steamed Rice (1.2kg (8cups)) | 3 | 5 | 5 | 6 |
| 1 Baked potato (255g (9oz)) | 19 | 21 | 27 | 28 |
| Salmon fillet (227g (8oz)) | 21 | 26 | 27 | 28 |
| Chocolate Cake in a Cup | 65 | 80 | 84 | 90 |
| Fresh Steamed Veggies (170g (6oz)) | 51 | 65 | 69 | 75 |
| Asparagus (227g (8oz)) | 33 | 45 | 48 | 48 |
| Dumplings (6ea) | 20 | 24 | 26 | 27 |

All ACP, Inc. commercial ovens are supported by our Culinary Center. Do not hesitate to contact us for any questions regarding food preparation, menu development and cooking times: testkitchen@acpsolutions.com



Heavy Volume MenuMaster[®] Commercial MDC/DEC Series

Power Output

- 1400-2000 Watts of power
- Superior method of microwave energy distribution
 - **Standard Models:** Provides even-heating throughout the entire cavity
 - **Centralized Models:** Provides targeted heating at the center of the cavity

Multi-language universal operation, with programming flexibility

- Oven interface and programming software supports 24 languages
- Smart USB connectivity standard
- Compatible with ACP Programming Application

Easy to Use

- Up to 100 programmable menu items simplifies cooking
- 11 power levels and 4 cooking stages for cooking flexibility
- Multiple quantity function automatically calculates cooking times for multiple portions
- Automatic Voltage Sensor adjusts to the power supply (*Korea only >1200W*)
- See-through door and lighted interior for monitoring without opening the door
- Ample 17 liter (0.6 cubic ft.) capacity accommodates a standard half-sized pan
- Stackable to save valuable counter space

Easy to Maintain

- Stainless steel exterior and interior for easy cleaning and increased durability
- Removable, cleanable air filter protects oven components
- Constructed to withstand the foodservice environment, multiple users and variable ambient temperatures
- Gasket sealed Borosilicate Glass tray for easy cleaning
- Interlock switch assembly is engineered for maximum durability and long life.

Optional Accessories

- Cavity shelf (SE10)
- Stainless cart/equipment stands: (CA24, CA30)
- Non-stick baskets (TB10/S, SB10/S, MB10/S)

Warranty

Warranty Certificate for this product can be found on the ACP, Inc. website at www.acpsolutions.com/warranty



Safety and Sanitation


This ACP, Inc. product meets and exceeds safety and sanitation standards set for commercial microwave ovens by UL, ETL, NSF, CSA, FDA, CE, Bureau of Standards, Metrology and Inspection (BSMI), Bureau of Indian Standards (BIS), Standards Association of Australia (SAA) Regulatory Compliance Mark (RCM) certified, Korea Certification (KC), and tested according to GB4706.1 & GB4706.90.



For other market regions, please see product literature online



© 2019 ACP, Inc.
Cedar Rapids, Iowa 52404

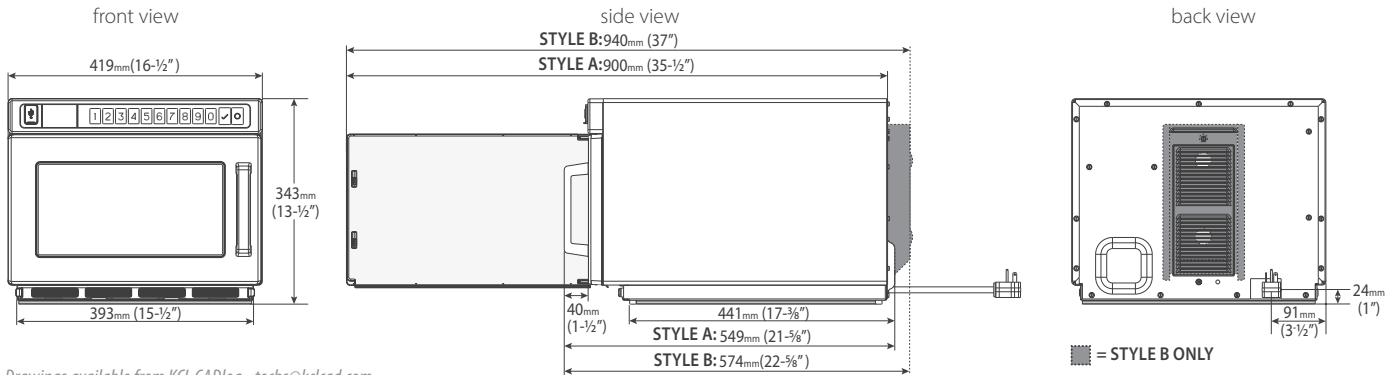

Drawings available from KCL CADlog - techs@kclcad.com

| Dimensions | | STYLE A | STYLE B |
|------------------------|-----------------------|-------------------------------|---------------------------|
| Exterior | Height | 343 (13 1/2") | 343 (13 1/2") |
| | Width | 419 (16 1/2") | 419 (16 1/2") |
| | Depth† | 549 (21 5/8")† | 574 (22 5/8")† |
| Cavity | Height | 171 (6 3/4") | 171 (6 3/4") |
| | Width | 330 (13") | 330 (13") |
| | Depth | 305 (12") | 305 (12") |
| Usable Cavity Space | | 17 liter (0.6 cubic ft.) | 17 liter (0.6 cubic ft.) |
| Door Depth | | 900 (35 1/2"), 90°+ door open | 940 (37"), 90°+ door open |
| Installation Clearance | Top | 51 (2") | 51 (2") |
| | Sides | 25 (1") | 25 (1") |
| | Back | None | None |
| Shipping Carton | Height | 473 (18 5/8") | 473 (18 5/8") |
| | Width | 556 (21 7/8") | 556 (21 7/8") |
| | Depth | 625 (24 5/8") | 625 (24 5/8") |
| Weight | | | |
| Product Weight | Ship weight (approx.) | UPS Shippable | |
| 31 kg. (68 lbs) | 34 kg. (74 lbs) | Yes, ISTA 1A | |

| Features | |
|--------------------------|--|
| Configuration | Countertop |
| Stackable | Yes |
| Display | LCD |
| Control System | Touchpad |
| Programmable Control | Yes, 10 pads |
| Braille | Overlay available |
| Settings Programmable | 100 |
| Max. Cooking Time | 60:00 |
| Microwave Distribution | Double rotating antennas, top and bottom |
| Power Levels | 11 |
| Defrost | Yes, power level 2 |
| Time Entry Option | Yes |
| Multiple Portion Setting | Yes, X2 by default, optional up to X9 |
| Stage Cooking | 4 stages |
| Interior Light | Yes, LED |
| Automatic Voltage Sensor | Yes (Korea only) |
| Air Filter | Yes, 1 removable |
| Signal | End of cycle, adjustable |
| Door Handle | Grab & Go |
| Exterior Finish | Stainless steel |
| Interior Finish | Stainless steel with gasket sealed borosilicate tray |

Measurements are millimeters. Measurements in () are US Standard

* IEC 60705 Tested

† Includes handle

MW=Microwave

Electrical Configuration

| Region | Model#/UPC | Automatic Voltage Sensor | Exterior Depth Style | Microwave Distribution Pattern | Power Consumption | Power Output (MW) | Power Source | Plug Configuration | Cord Length | Frequency | Magnetron |
|---|--------------------------|--------------------------|----------------------|--------------------------------|-------------------|-------------------|-----------------------------------|--------------------|----------------|-----------|-----------|
| Australia single phase | DEC14E2A 728028129533 | No | B | Standard | 2100W, 9.7 A | 1400W* | 230-240V, 50Hz, 10A, single phase | Type 1 Australia | 1.7m (5.5 ft.) | 2450MHz | 2 |
| Australia single phase | DEC18E2A 728028129540 | No | B | Standard | 2900W, 12.6 A | 1800W* | 230-240V, 50Hz, 15A, single phase | Type 1 Australia | 1.7m (5.5 ft.) | 2450MHz | 2 |
| Asia single phase | DEC18M 728028422689 | No | B | Center | 2900W, 12.6 A | 1900W* | 230-240V, 50Hz, 16A, single phase | CEE 7/7 "Schuko" | 1.7m (5.5 ft.) | 2450MHz | 2 |
| China single phase | DEC18MC 728028422665 | No | B | Center | 3100W, 14 A | 2000W* | 220V, 50Hz, 16A, single phase | CHINA | 1.7m (5.5 ft.) | 2450MHz | 2 |
| India single phase | DEC18E2I 728028316032 | No | B | Standard | 2900W, 12.6 A | 1800W* | 230-240V, 50Hz, 16A, single phase | BS546 | 1.7m (5.5 ft.) | 2450MHz | 2 |
| Korea single phase | MDC182K 728028376906 | Yes | A | Standard | 3000W, 14.4 A | 1800W* | 208/240V, 60Hz, 20A, single phase | CEE 7/7 "Schuko" | 1.7m (5.5 ft.) | 2450MHz | 2 |
| Malaysia, Singapore, Hong Kong single phase | DEC18MU 728028422696 | No | B | Center | 2900W, 12.6 A | 1900W* | 230-240V, 50Hz, 13A, single phase | BS1363A | 1.7m (5.5 ft.) | 2450MHz | 2 |
| Taiwan single phase | MDC18MT 728028422672 | No | B | Center | 3000W, 14.4 A | 1900W* | 220V, 60Hz, 20A, single phase | NEMA 6-20P | 1.7m (5.5 ft.) | 2450MHz | 2 |



225 49th Ave. Dr. SW, Cedar Rapids, IA 52404 U.S.A.
800-233-2366 • 319-368-8120 • Fax: 319-368-8198
www.acpsolutions.com

Part No. 20271303

Updated 09/20/2019

© 2019 ACP, Inc., Cedar Rapids, Iowa 52404

an Ali Group Company



The Spirit of Excellence

Specification #:

AIA File #: